



Log Cabin "DG-16"

Project Dimensions

6 × 7.7 / 46.8 m²

Цена

9,553 €

Timber



45 mm




65 mm
+ 2,332 €


Assembling a house kit


No assembly required


Assembly required
+ 2,388 €

Project planning

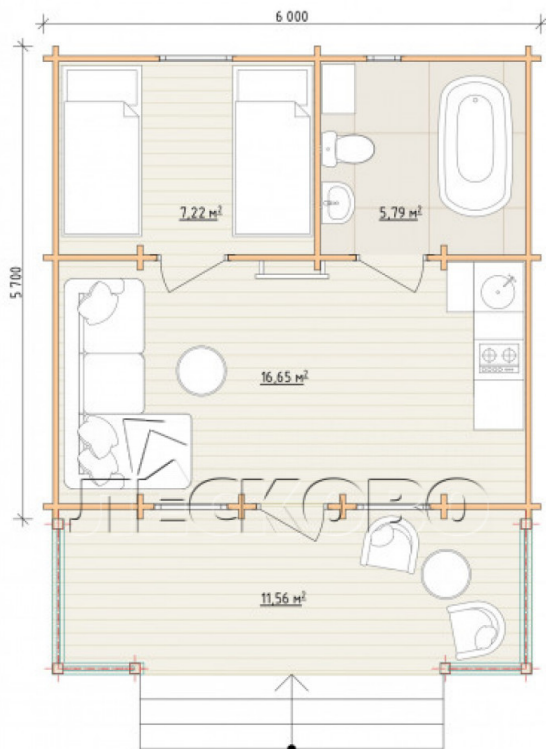

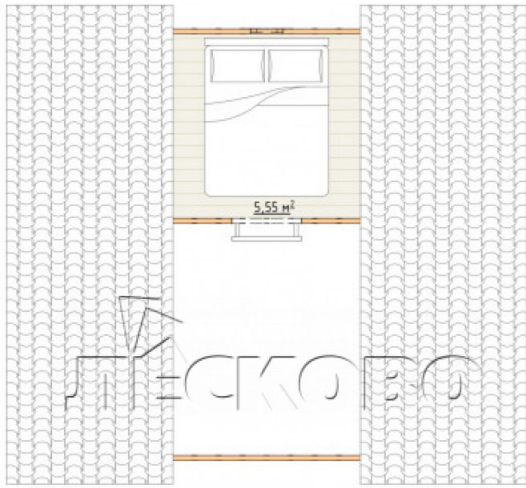

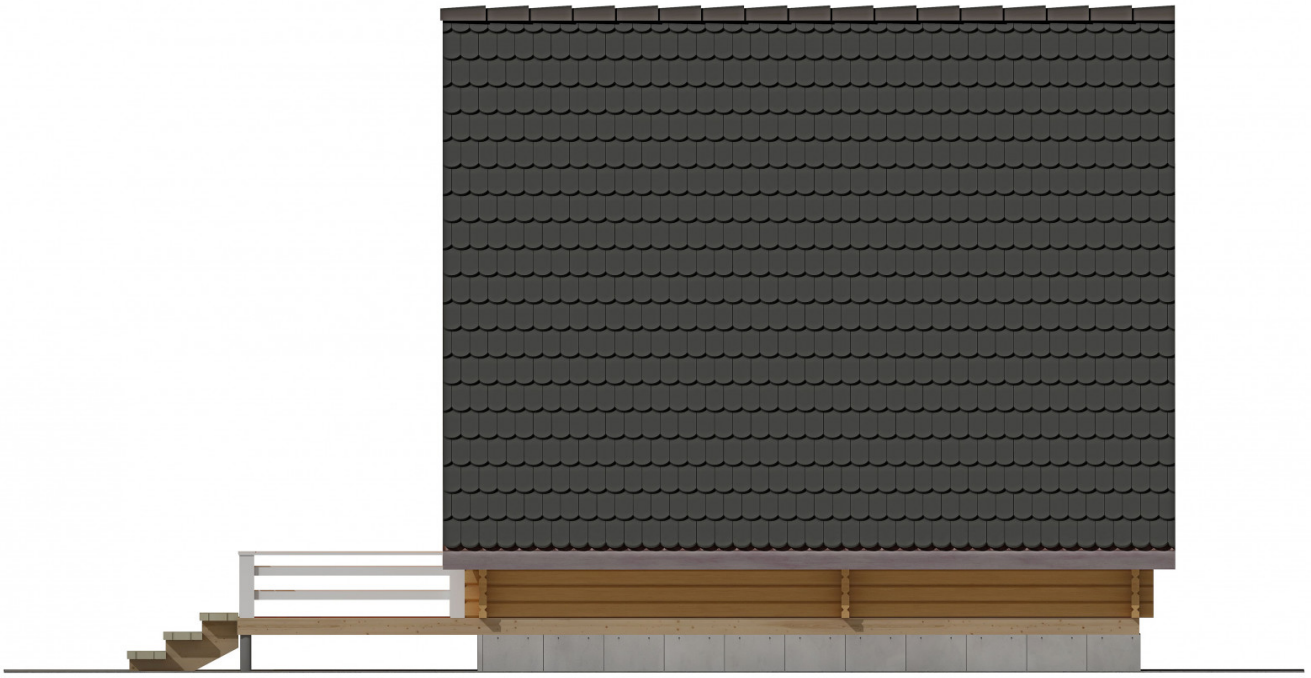

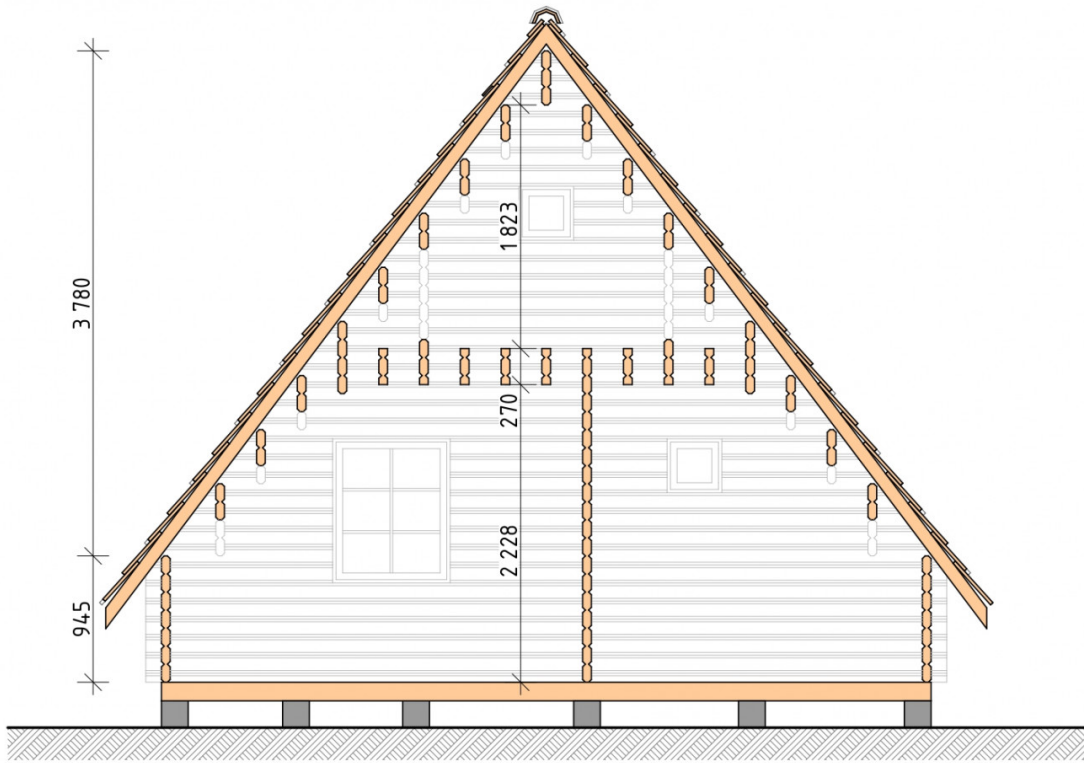

House Kit

- Wall kit: 44 × 145mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m;
- Logs, lower harness: board 45 × 145 mm chamber drying 12-16%;
- Floors: floorboard 35 mm, Chamber drying;
- Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
- Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;



Window 0.87×1.17 0.40×0.38 м.2 шт.
м.3 шт.

- Wooden doors;




2 шт.

0.84×1.885 м.
glass.1 шт.

7. Platbands: dry planed board 20 × 100 mm;

8. Roof: shingles.

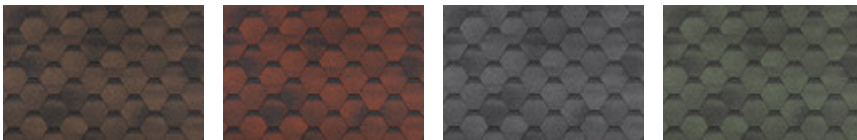

9. Skirting board 35 mm.

+7 (4942) 499-770

156014, г. Кострома, ул. Базовая, д. 8