Outdoor sauna "BL" series 3.5×5.5

Project Dimensions	Full house set
3.5 × 5.5 / 15.1 m²	**4,343 €**

Timber

45 мм

65 мм
+ 1,020 €

Project planning

3 500
5 500
4, 80
M2
2, 84
M2
8, 38
M2

Разрез

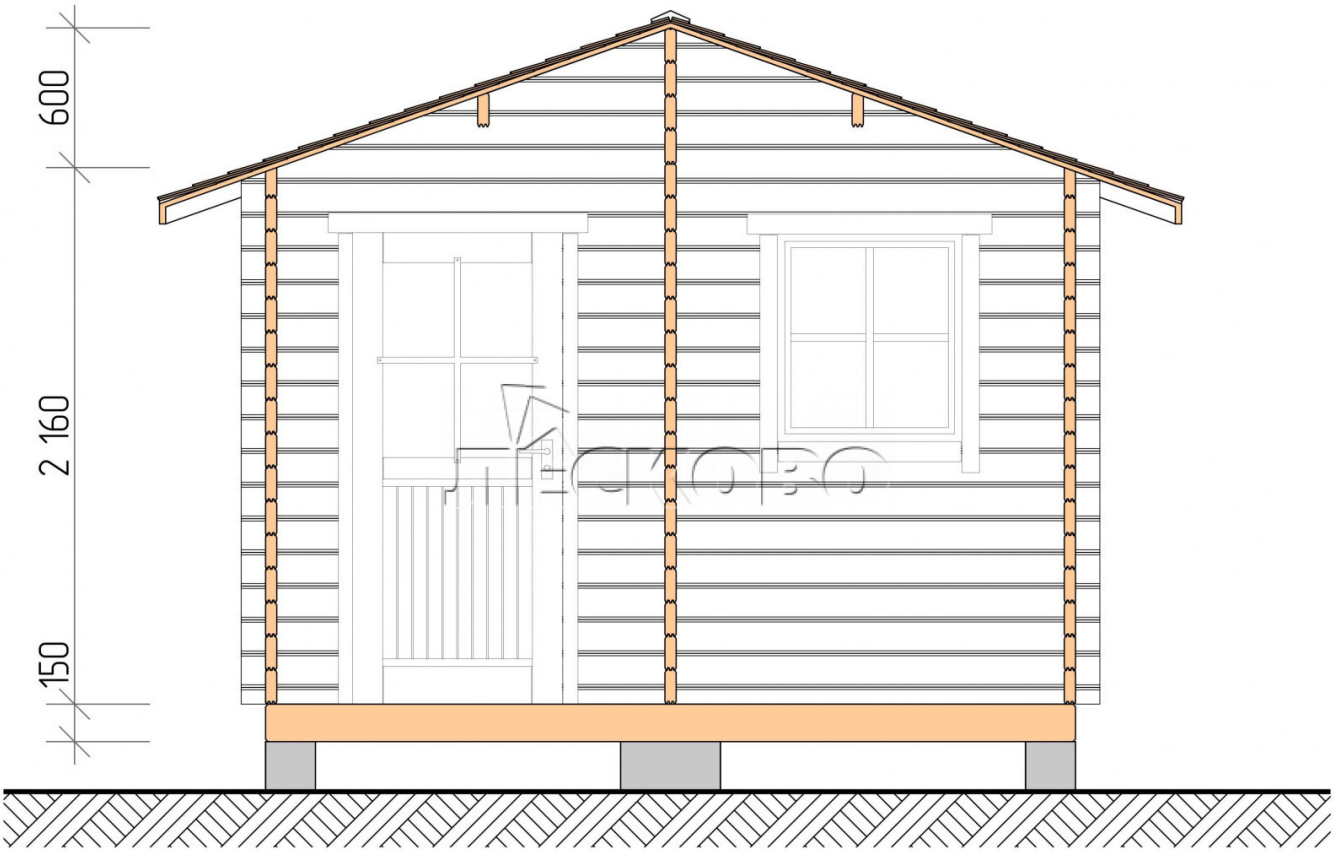

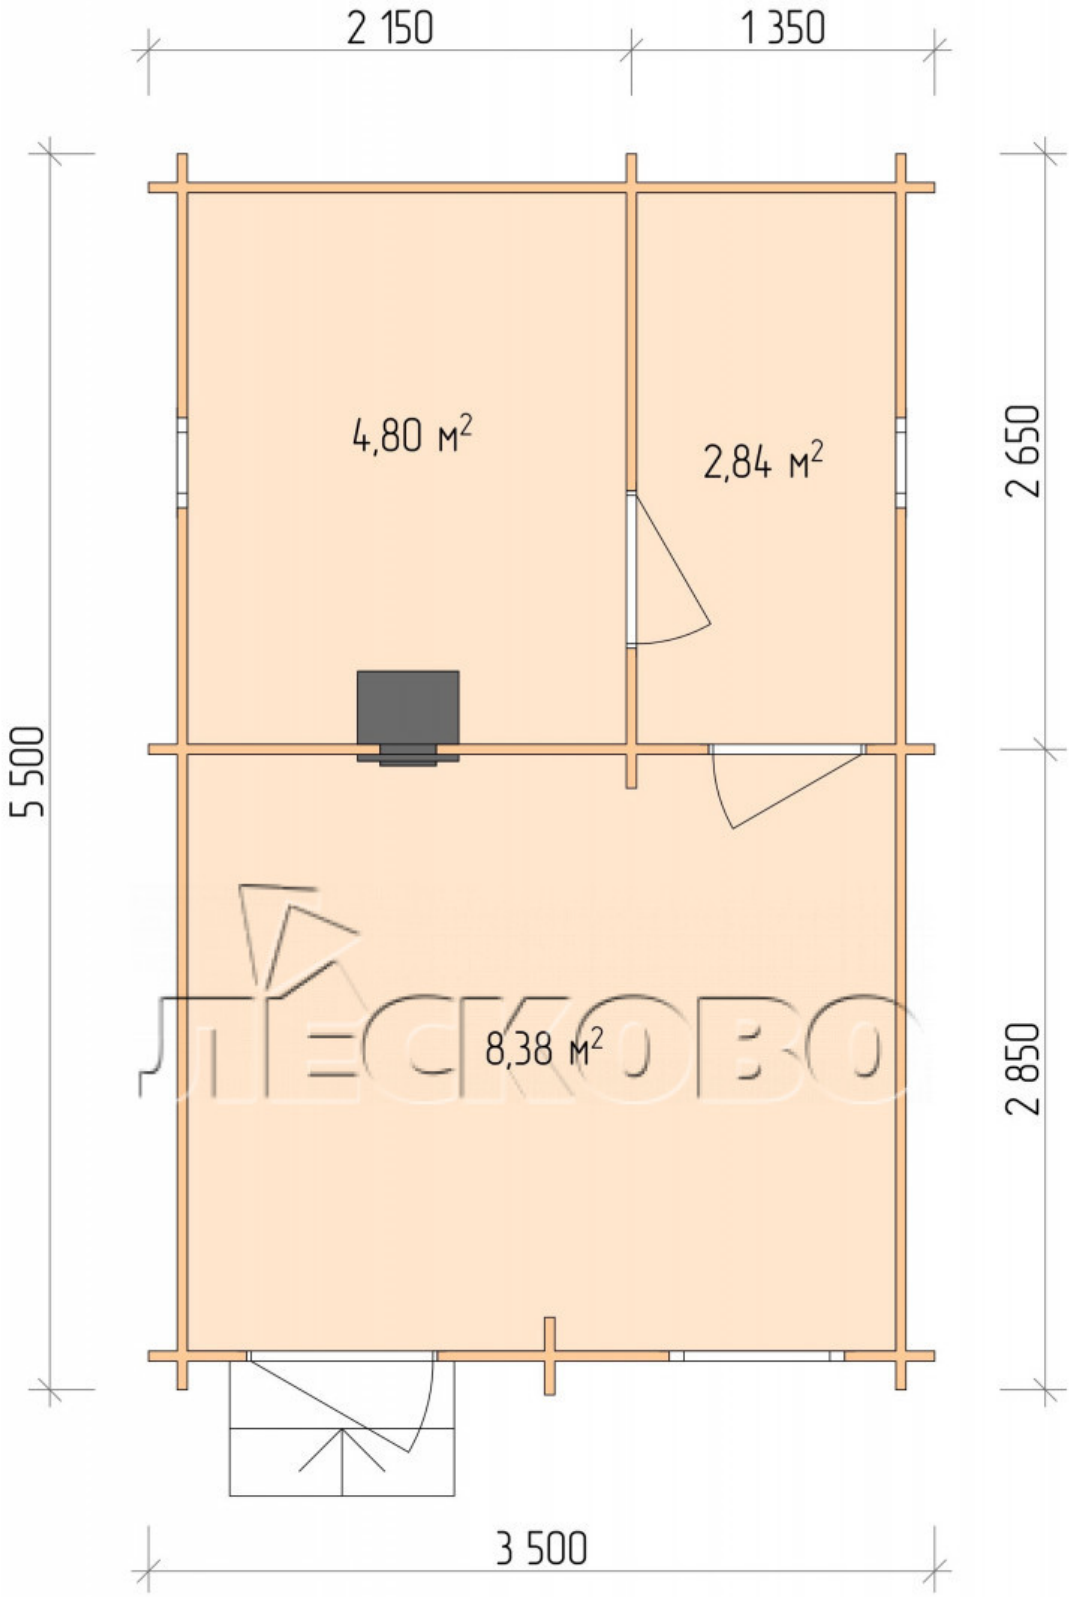

House Kit

- Wall kit: 44 × 145 mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m.;

- Logs, lower harness: board 45 × 145 mm chamber drying 10-12%;
- Floors: floorboard 35 mm., Chamber drying;
- Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
- Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;

0.40×0.38 м.2 шт.

0.87×0.78 м.1 шт.

- Wooden doors;

0.84×1.885 м.
bath.2 шт.

0.84×1.885 м.
glass.1 шт.

7. Platbands: dry planed board 20 × 100 mm;
8. Roof: shingles;




9. Skirting board 35 mm.

+7 (4942) 499-770

156014, г. Кострома, ул. Базовая, д. 8